

# Fractank.™

PORTABLE LARGE VOLUME WATER TANK

## PORTABLE, LIGHTWEIGHT, EASY TO USE

SEI's new FRAC tank is designed for storing large volumes of water for use in hydraulic fracturing.

One semi-truck can transport 24 tanks with a combined storage capacity of an astounding 1,200,000 USG (28,800 BBLs (US) or 4560 m3). It would take 57 trucks to transport the same storage capacity in 500 BBL steel tanks.


## UNIQUE ADVANTAGES

- **Convenient:** collapsible, lightweight, easy to relocate.
- **Rapidly deployable:** can be unrolled or repacked quickly using the optional 4-person FTDS system.
- **Quick draining:** built-in drain ports or use the optional dump port to further speed up drainage.
- **Lower transportation costs:** can be transported easily (no road permits needed).
- **Quick set-up:** one FRAC Tank can store as much as 50,000 USG (1200 BBLs (US) or 190 m3). In one day, using a manifold system, multiple tanks can be set-up to provide whatever volume of storage is required.
- **Durable:** more abrasion and chemically-resistant than other materials, cold-resistant to -50 °C.
- **Less risk of freeze-up:** due to its lower profile, only 5' (1.5 m) high when fully filled, the FRAC tank offers good heat retention and low wind

## PROPRIETARY FABRIC

Ideal for use in winter temperatures as low as -50 C, the FRAC Tank can also be used constantly with heated fluids up to +72 C (with limited exposure to +82 C). Another feature of this unique fabric is its high resistance to abrasion — an important aspect when tanks are continually moved from site to site.

Typical mil spec fabrics have abrasion resistance of 6,000-13,000 cycles while the FRAC tank fabric has a 73,000 cycle abrasion resistance to handle the wear and tear of continual movements.

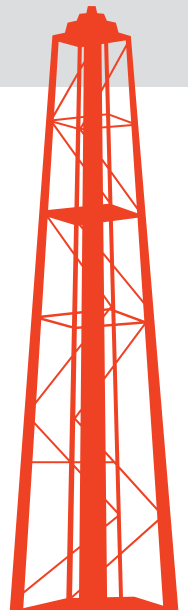

# Fractank.™

PORTABLE LARGE VOLUME WATER TANK

## COLLAPSIBLE, FOLDABLE, EASY TO MOVE


SEI's FRAC tanks are rapidly deployable using our optional 4-person Frac Tank Deployment System (FTDS). SEI's FRAC Tank can be shipped via all methods – by land, sea or air.



## CONSTRUCTED TO ENDURE

The average FRAC tank will be moved multiple times during its service life. SEI FRAC Tanks are made from heavy-duty industrial fabric that features a thicker and denser coating to ensure a level of durability that will stand up to frequent relocations and punishing outdoor conditions. Multiple fill/drain ports are provided on the side of every tank for convenient connection to your frac water system and provide flow rates up to 19 m<sup>3</sup> per minute, 5,000 USG per minute or 119 BBL per minute. For additional durability, heavy-duty abrasion patches protect the tank around these fill/drain ports. An optional dump port is also available to further increase the speed of drainage and help with sludge clean out.

50,000 USG (190 m <sup>3</sup> ) FRAC TANK				
Tank Size	Crated Dims.	Tank Weight	Fittings and Manifolds	Reusable Crate
32.8' x 50.2'	90 x 58 x 46 in.	1279 lbs.	300 lbs.	530 lbs.
10 m x 15.3 m.	2.3 x 1.5 x 1.2 m.	580 kg.	136 kg.	240 kg.

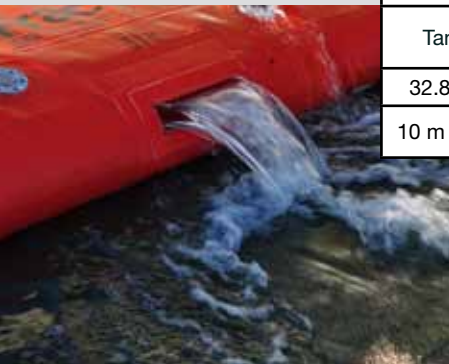

SEI Industries Ltd. 7400 Wilson Ave, Delta, BC Canada V4G 1H3  
 604.946.3131 seisales@sei-ind.com www.sei-ind.com

