

# BAMBI POWERFILL™


## POWERED SHALLOW-FILL CAPABILITY FOR THE BAMBI

**Add rapid shallow-fill capability to your Bambi Bucket®.** Fight fires faster, more efficiently and at a lower cost – use the Bambi Powerfill™ to fill your Bambi Bucket® to maximum capacity from almost any water source. Just a one-foot (30 cm) depth of water is all that's required for the Bambi Powerfill™ to replenish your Bambi Bucket®, letting you fill up quickly from tanks, streams or ponds with minimal debris uptake. No need to waste fuel and flight time searching for suitable water sources – simply use the Bambi Powerfill™.



### TOP FEATURES

- Retrofittable to existing Bambi Bucket.
- Increases operational efficiencies as practically any water source can now be used.
- With the flange kit installed, the Powerfill™ pump can be bolted on for action, or removed in the field by one person.

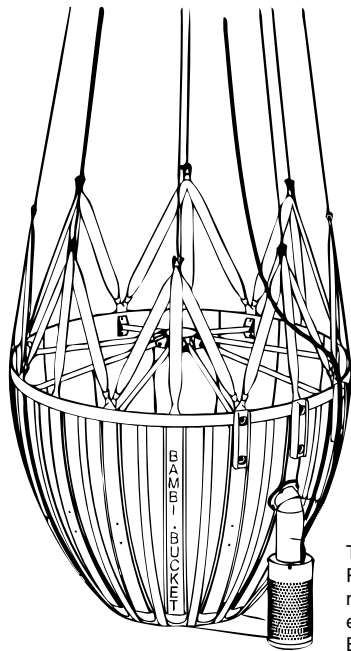

The Bambi Powerfill™ is easily mounted on the exterior of the Bambi Bucket®.

#### RETROFITTABLE TO BAMBI BUCKET® MODELS

BB 2024 – BB 4453


#### BAMBI BUCKET® SPECIFICATIONS

MODEL	CURRENT DRAW	FILL TIME	BUCKET GROSS WEIGHT
	amps	seconds	lb (kg)
2024	45	30	2175 (989)
2226	45	33	2345 (1066)
2732	45	45	2893 (1315)
3542	45	52	3701 (1685)
4453	45	65	4619 (2100)



# BAMBI POWERFILL™

POWERED SHALLOW-FILL CAPABILITY FOR THE BAMBI

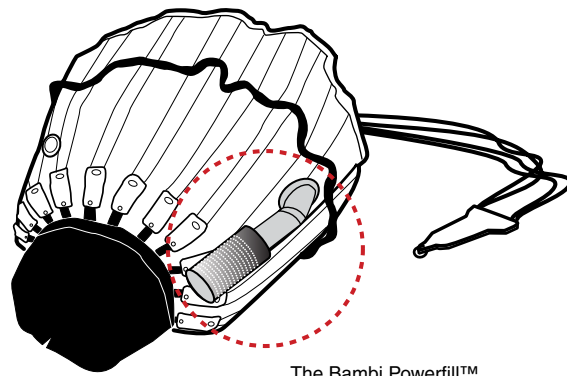

The Bambi Powerfill™  
(installed on a Bambi  
Bucket®).



## FEATURES

- Large intake screen enables a fast fill in only one foot (30 cm) of water with minimal debris uptake.
- Capable of using almost all the water in helicopter dip tanks, leaving only 7 - 8 inches (18 - 20 cm) of water behind.
- Requires 45 amps power to operate.
- The conventional dipping method may still be used with the Powerfill™ installed.

## COMPATIBLE WITH

- Fireflex Flextank (Pumpkin Tank)
- Fireflex Heliwell
- Fireflex Low-Profile Tank
- Fireflex Oasis Frame Tank



**Bambi**  
**BUCKET®**

## SEI INDUSTRIES LTD.

7400 Wilson Avenue  
Delta, BC, Canada, V4G 1E5

**Toll-Free:** 1.866.43.BAMBI  
**Canadian Office Tel:**  
1.604.946.3131  
**Fax:** 1.604.940.9566

**International Office Tel:**  
1.246.228.4908  
**Fax:** 1.246.228.3326  
**E-mail:** sales@sei-ind.com