

SunShade Installation Guide


Deploying the SunShade



A SunShade in tan colour is shown overtop of a tan-colored tank.

SunShades are designed as a protective cover for collapsible tanks and come in either green or tan colours. Black and white are also available on special order.

The SunShade can be attached with the tank empty or full. If the tank is empty, make sure to install the fill/drain and vent kits before the SunShade. If the tank is filled before the SunShade is installed, make sure to pull the handles to the edge of the tank, before filling. Spread the SunShade over the tank with the fill/drain slot and vent hole in line with the fitting. The slit in the SunShade (for the fill/drain) is used when the tank is filled and when a hose is connected. This allows you to install the SunShade without removing the hose. The SunShade must be placed in such a way that the hold-down straps are directly above the handles (see picture below).

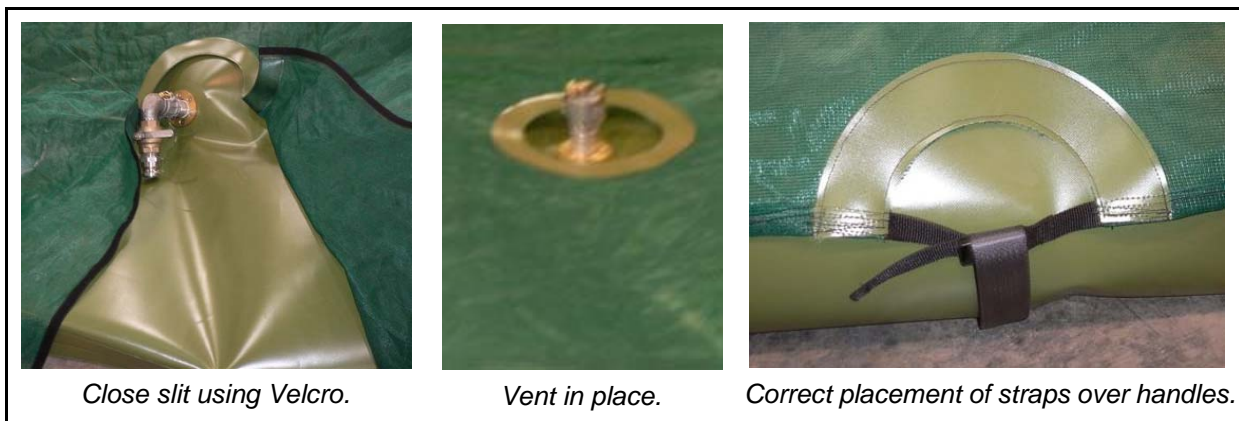

Close slit using Velcro.

Vent in place.


Correct placement of straps over handles.

SunShade Installation Guide

Next, pull the SunShade corner pockets over the tank corners, then separate the webbing attachments and pass them through the handle loop as shown below.



Each corner has a bungee cord with a hook that must be connected to the webbing attachments.

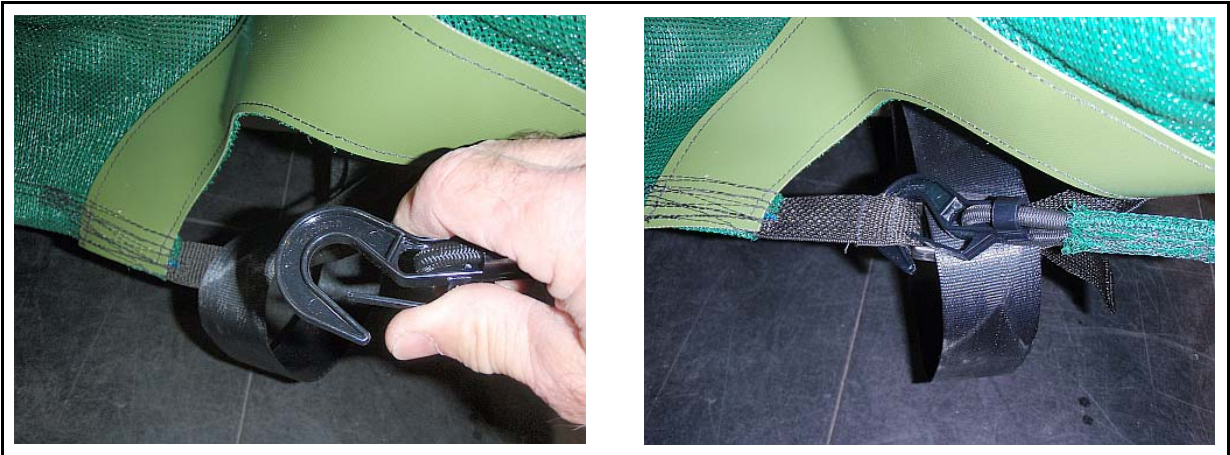

Important Note

Once a month, roll the SunShade back. Inspect half the tank on one end, repair and clean as detailed in the tank manual, then redeploy the SunShade. Repeat for other half.