


MAXIMIZE EVERY DROP BAMBI MAX WITH UNLIMITED MULTIPLE DROPS



An entirely new Bambi Bucket® that offers the same robust, durable bucket that you've come to know over the past 30 years. The Bambi Max now features a lightweight, low power draw, quick operating multiple drop valve that increases volume per drop through a fuel cycle, requires less maintenance and offers reliability for years to come.

FEATURES

- Lightweight – lightest collapsible multiple drop bucket available on the market
- Low power draw – less than 5 amps (3-wire system)
- Unlimited valve actuations – opens and closes in milliseconds
- Load control – unlimited load sheds (2% of load each)
- Low maintenance – only 4 bolts to remove valve for maintenance

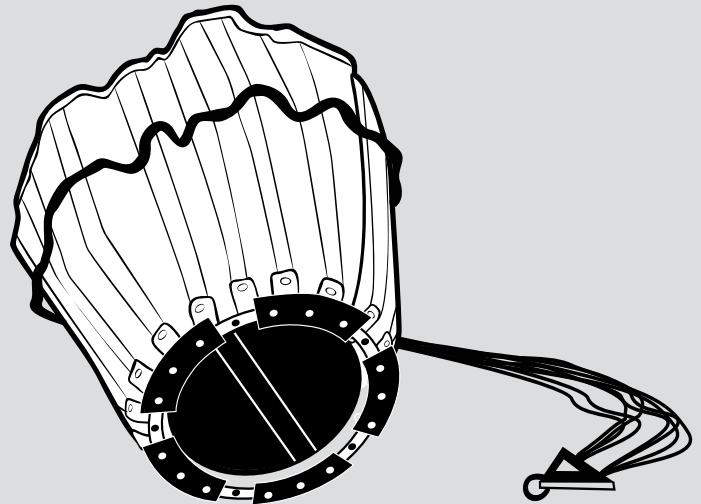


The ability to pre-select loads allows efficiency at both the dip site and over multiple hot spots which can be targeted by releasing portions of water over each one. The helicopter operator can also choose to unload as many separate drops as required. Manual load control is standard in every Bambi Max.

SEI INDUSTRIES LTD.
7400 Wilson Avenue
Delta, British Columbia
Canada V4G 1H3

International: 1.866.43.BAMBI
Canadian Tel: 1.604.946.3131
E-mail: sales@sei-ind.com
WWW.BAMBICKET.COM



BAMBI MAX

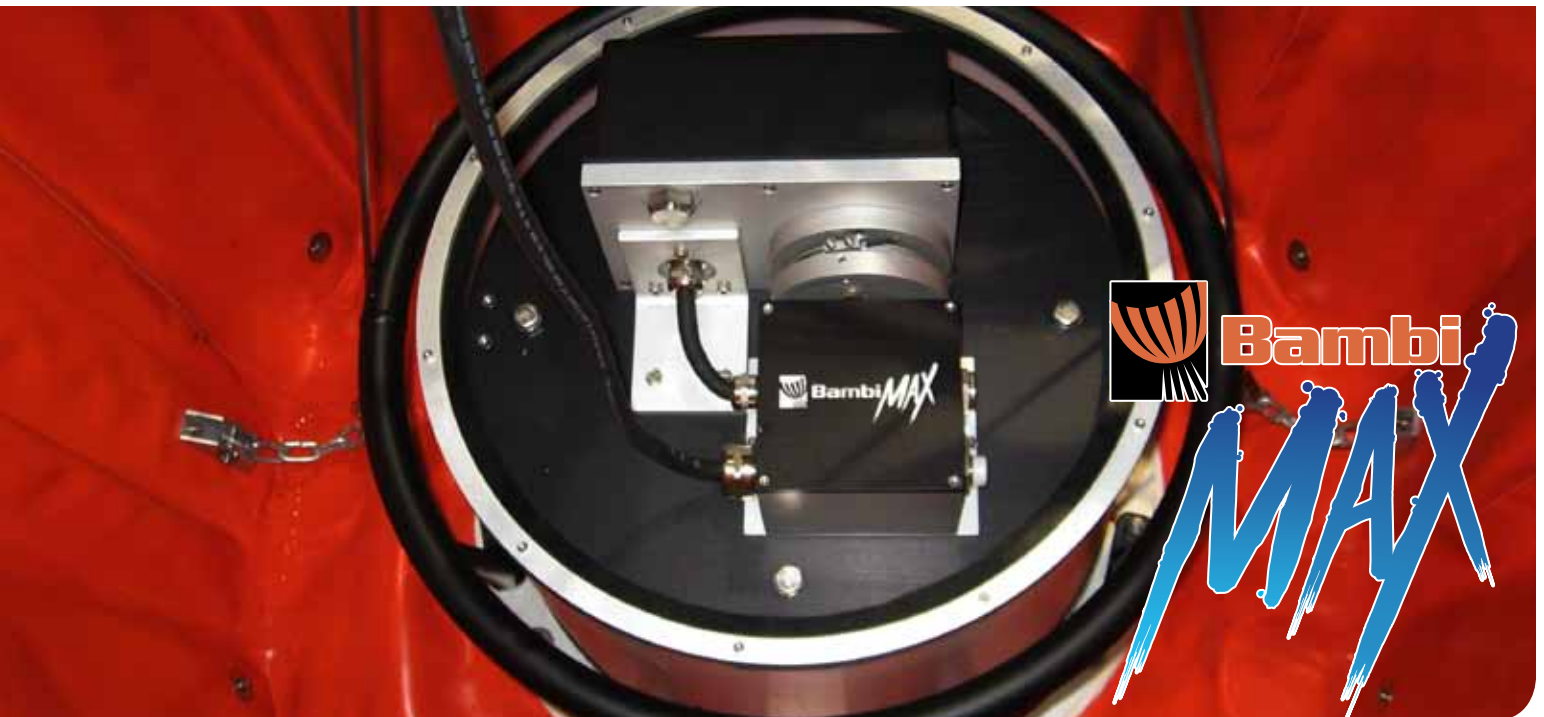

Greater efficiency on each fuel cycle makes this a desirable piece of equipment prompting many firefighting agencies to request operators with these capabilities first and release them last.

BAMBI MAX SPECIFICATIONS

MODEL NUMBER	CAPACITY		EMPTY WEIGHT		GROSS WEIGHT	
	USG	L	Lbs	Kg	Lbs	Kg
BBX 1518	180	680	93	42	1590	720
BBX 1821	216	820	102	46	1900	860
BBX 2024	240	910	137	62	2140	970
BBX 2226	260	1000	135	61	2330	1060
BBX 2732	320	1230	145	66	2840	1290
BBX 3542	420	1590	152	69	3650	1660
BBX 4453	530	2000	220	100	4620	2100
BBX 5566	660	2500	290	130	5790	2630
BBX 6578	780	2950	330	150	6830	3100
BBX 7590	900	3410	350	160	7850	3560
BBXHL 4000	1060	4000	370	170	9170	4160
BBXHL 5000	1320	5000	380	170	11380	5160
BBXHL 7600	2010	7600	470	210	17190	7800
BBXHL 9800	2590	9800	530	240	22080	10020

Capacities and weights are accurate to within ±5%