

TORRENTULA® POWERFILL™


ADD RAPID SHALLOW-FILL CAPABILITY TO YOUR TORRENTULA® VALVE

The Torrentula PowerFill is designed to enable pilots to fill Torrentula Buckets from shallow water sources. Use the Torrentula PowerFill alongside the Torrentula Valve, as a retrofittable option for rapid refilling almost anywhere. Optimize the operational efficiency of your helicopters with the Torrentula PowerFill system.



TOP FEATURES

- Enables a fast bottom-fill in only 18 inches (48 cm) of water.
- Increases operational efficiencies as operators can draw from practically any accessible water source.
- Retrofittable to any existing Torrentula Bucket.
- Unified design — the Torrentula PowerFill system is integrated with the Torrentula Valve (shown here).

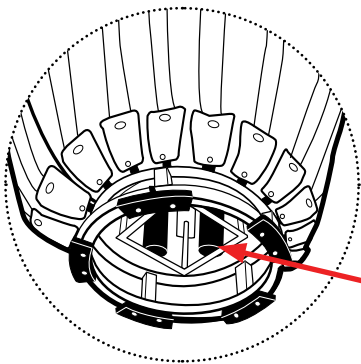

The Torrentula PowerFill features from one to four integrated pumps, depending on bucket capacity.



The Torrentula PowerFill, seen from inside a Torrentula bucket.

AVAILABLE FOR BUCKET MODELS

BB2732 – HL9800
(324 USG to 2600 USG)

TORRENTULA POWERFILL EXAMPLE FILL TIMES

FOR BUCKET MODEL (CAPACITY)	EXAMPLE FILL TIME
2732 - 4453 (324 USG to 530 USG)	20 to 33 seconds (with 2 pumps)
5566 - 6578 (660 USG to 780 USG)	44 to 51 seconds (with 2 pumps)
HL7590 (900 USG)	30 seconds (with 4 pumps)
HL5000 (1320 USG)	50 seconds (with 4 pumps)
HL7600 - HL9800 (2000 USG to 2600 USG)	76 to 98 seconds (with 4 pumps)



TORRENTULA POWERFILL

ADD RAPID SHALLOW-FILL CAPABILITY TO YOUR TORRENTULA VALVE



The Torrentula PowerFill is ideal for filling buckets from dip tanks such as the Fireflex Pumpkin Tank shown here.

TORRENTULA POWERFILL SPECIFICATIONS					
FOR BUCKET MODEL (CAPACITY)	CURRENT (amps)	NUMBER OF PUMPS	TORRENTULA POWERFILL WEIGHT Lbs (Kg)	EMPTY BUCKET WEIGHT WITH TORRENTULA POWERFILL Lbs (Kg)	GROSS BUCKET WEIGHT WITH TORRENTULA POWERFILL Lbs (Kg)
2732 (324 USG)	45 per pump	2	95 (43)	278 (126)	2940 (1334)
3542 (420 USG)	45 per pump	2	95 (43)	292 (132)	3755 (1703)
4453 (530 USG)	45 per pump	2	95 (43)	312 (142)	4675 (2121)
5566 (660 USG)	45 per pump	2	130 (59)	555 (252)	5907 (2679)
5870 (700 USG)	45 per pump	2	130 (59)	581 (264)	6254 (2837)
6578 (780 USG)	45 per pump	2	130 (59)	606 (275)	6940 (3151)
7590 (900 USG)	45 per pump	4	190 (86)	685 (311)	7937 (3600)
HL5000 (1320 USG)	45 per pump	4	190 (86)	700 (318)	11552 (5240)
HL7600 (2000 USG)	45 per pump	4	200 (91)	785 (356)	17287 (7841)
HL9800 (2600 USG)	45 per pump	4	200 (91)	850 (386)	22352 (10139)



Bambi Bucket



Fireflex



Dragon



Remote Site



Environmental

FEATURES

- Enables a fast bottom-fill in only 18 inches of water.
- Increases operational efficiencies as operators can draw from practically any water source.
- Retrofittable to any existing Torrentula Bucket.
- Unified design – the Torrentula PowerFill system is integrated with the Torrentula Valve.

COMPATIBLE WITH

- Torrentula Valve



Bambi
BUCKET®

SEI INDUSTRIES LTD.

7400 Wilson Avenue
Delta, BC, Canada, V4G 1E5

Toll-Free: 1.866.43.BAMBI

Canadian Office Tel:
1.604.946.3131

International Office Tel:
1.246.228.4908

Fax: 1.604.940.9566

E-mail: sales@sei-ind.com

Web: www.sei-ind.com